

Ecofit Ledtubes T8

Ecofit LEDtube 1500mm 20W 865 T8



Upgrade to efficient, long-lasting LED tubes with the Ecofit LED tubes. Ecofit LED tubes are a fast and easy way to replace your old fluorescent tubes with modern, efficient LED technology. Good quality of light with a natural lighting effect for use in general lighting applications with low initial investment – an environmentally friendly solution.

Product data

General Information		Power factor (nom.)		0.5
Cap base	G13 [Medium Bi-Pin Fluorescent]	Voltage (Nom)	220–240 V	
EU RoHS compliant	Yes	Temperature		
Nominal lifetime (nom.)	15000 h	T-ambient (max.)	45 °C	
Switching cycle	50,000X	T-ambient (min.)	-20 °C	
Light Technical		T storage (max.)	65 °C	
Colour Code	865 [CCT of 6,500 K]	T storage (min.)	-40 °C	
Technical Beam Angle (Nom)	240 °	T-Case maximum (nom.)	60 °C	
Lamp Luminous Flux 25°C EL (Nom)	2000 lm	Controls and Dimming		
Colour Designation	Cool Daylight	Dimmable	No	
Colour Temperature, horizontal (Nom)	6500 K	Mechanical and Housing		
Lamp Luminous Efficacy EM (Nom)	100.00 lm/W	Product length	1500 mm	
Colour consistency	<6	Bulb shape	Tube, double-ended	
Colour Rendering Index, horiz (Nom)	80	Approval and Application		
LLMF at end of nominal lifetime (nom.)	70 %	Energy-saving product	Yes	
Operating and Electrical		Approval marks	RoHS compliance CE marking KEMA Keur certificate	
Input frequency	50 to 60 Hz			
Power (Rated) (Nom)	20 W			
Starting time (nom.)	0.5 s			
Warm-up time to 60% light (nom.)	0.5 s			



Ecofit Ledtubes T8

Lifetime

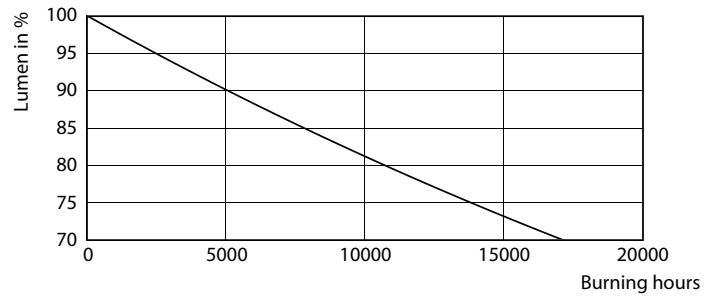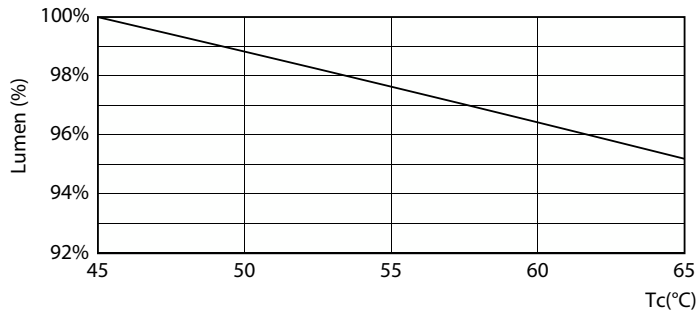


LEDtube Ecofit 16W G13 840 24D ND

LEDtube Ecofit 16W G13 840 24D ND

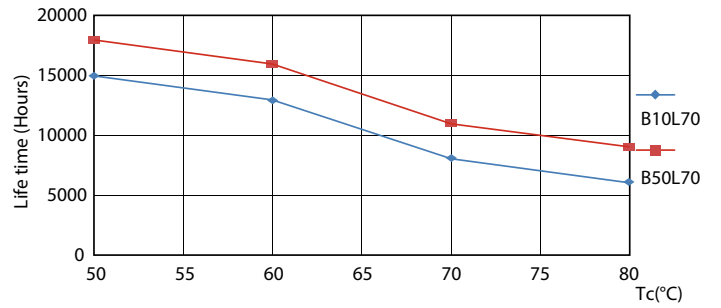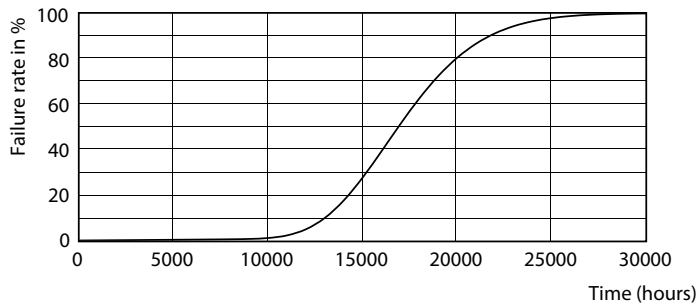

LEDtube Ecofit 16W G13 840 24D ND

LEDtube Ecofit 16W G13 840 24D ND

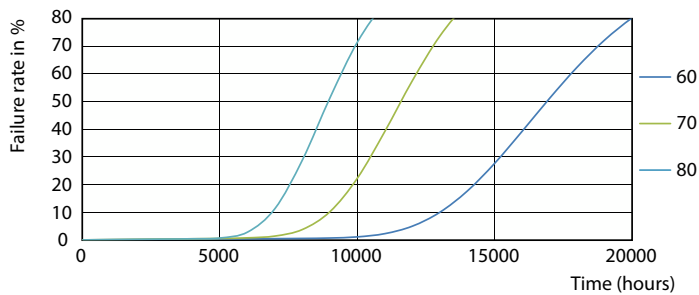

LEDtube Ecofit 16W G13 840 24D ND

Ecofit Ledtubes T8

