

H07V-U

H07V-R


H07V-K

450/750V



M :

Single core PVC insulated non sheathed cables for general purposes

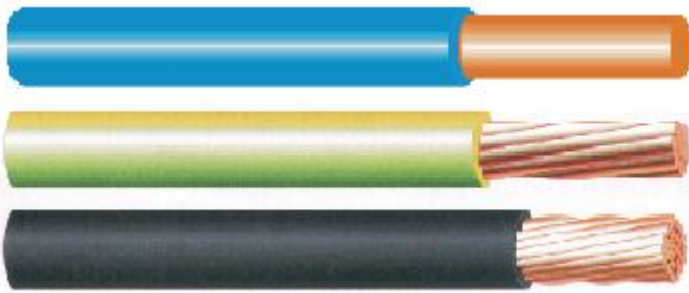

B	M	B	M
Conductors:		mm	b qb m tt b q bb: M ;
		b	
		b	q m
		b	
Insulation:		B b	ttm x
Colour of insulation		q mx	v tt b q v m q qb ttq

B	B	B	
Maximum conductor operating temperature:		B	
Lowest ambient temperature for fixed installation:		B	
Lowest installation temperature:		B	
Maximum short-circuit conductor temperature:		B	
Test voltage:			
Flame retardant:		B	
Minimum bending radius:		qb q (
	≤	≤	≤
M q tt			
B q tt m m	q m m		

B	M
m	m m tt b ttm q b m tt q qb x : tt q q b
m	m m q m m qb mq q q tt :b: q tt :b: q :
Standard length cable packing	m qm q m q m qtt : q q b m m q q mq tt

